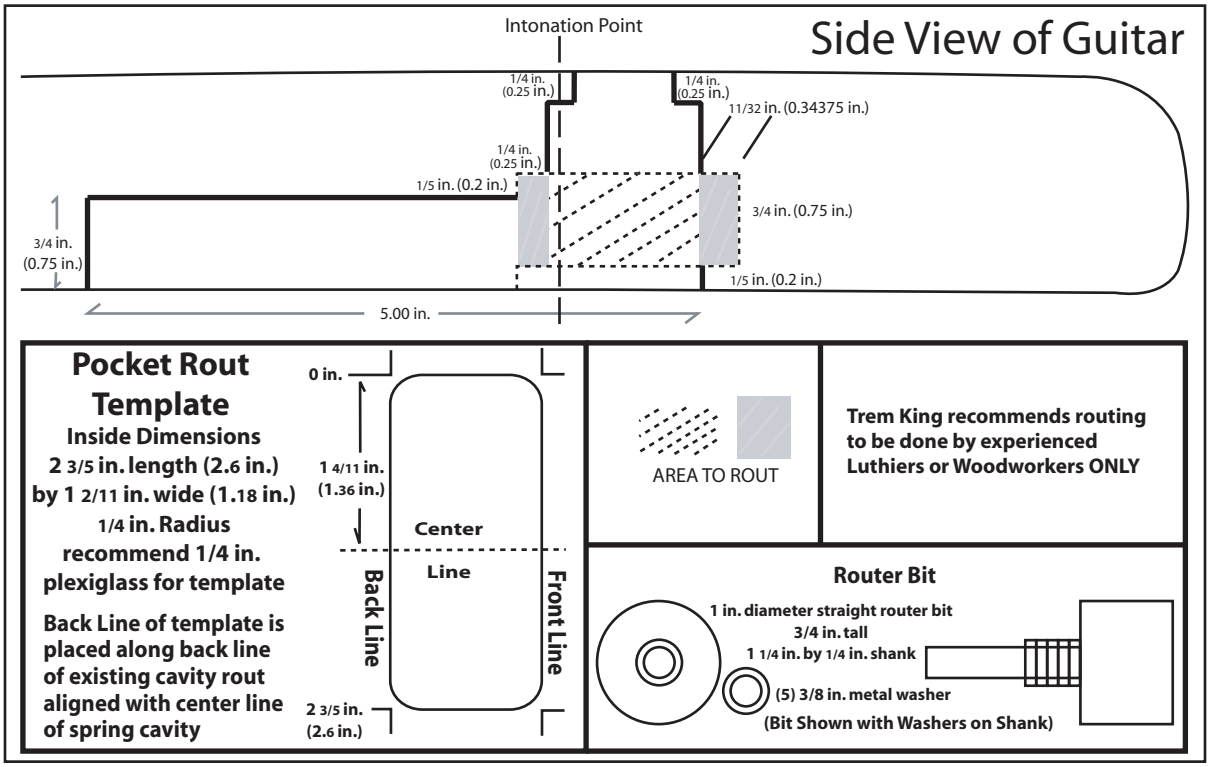
Side View of Guitar
Intonation Point
1/4 in. (0.25 in.)
1/4 in. (0.25 in.)
11/32 in. (0.34375 in.)
1/4 in. (0.25 in.)
1/5 in. (0.2 in.)
3/4 in. (0.75 in.)
3/4 in. (0.75 in.)
1/5 in. (0.2 in.)
5.00 in.
Pocket Rout Template
Inside Dimensions
2 3/5 in. length (2.6 in.)
by 1 2/11 in. wide (1.18 in.)
1/4 in. Radius
recommend 1/4 in. plexiglass for template
Back Line of template is placed along back line of existing cavity rout aligned with center line of spring cavity
0 in.
1 4/11 in. (1.36 in.)
Center Line
Back Line
Front Line
2 3/5 in. (2.6 in.)
AREA TO ROUT
Trem King recommends routing to be done by experienced Luthiers or Woodworkers ONLY
Router Bit
1 in. diameter straight router bit
3/4 in. tall
1 1/4 in. by 1/4 in. shank
(5) 3/8 in. metal washer
(Bit Shown with Washers on Shank)

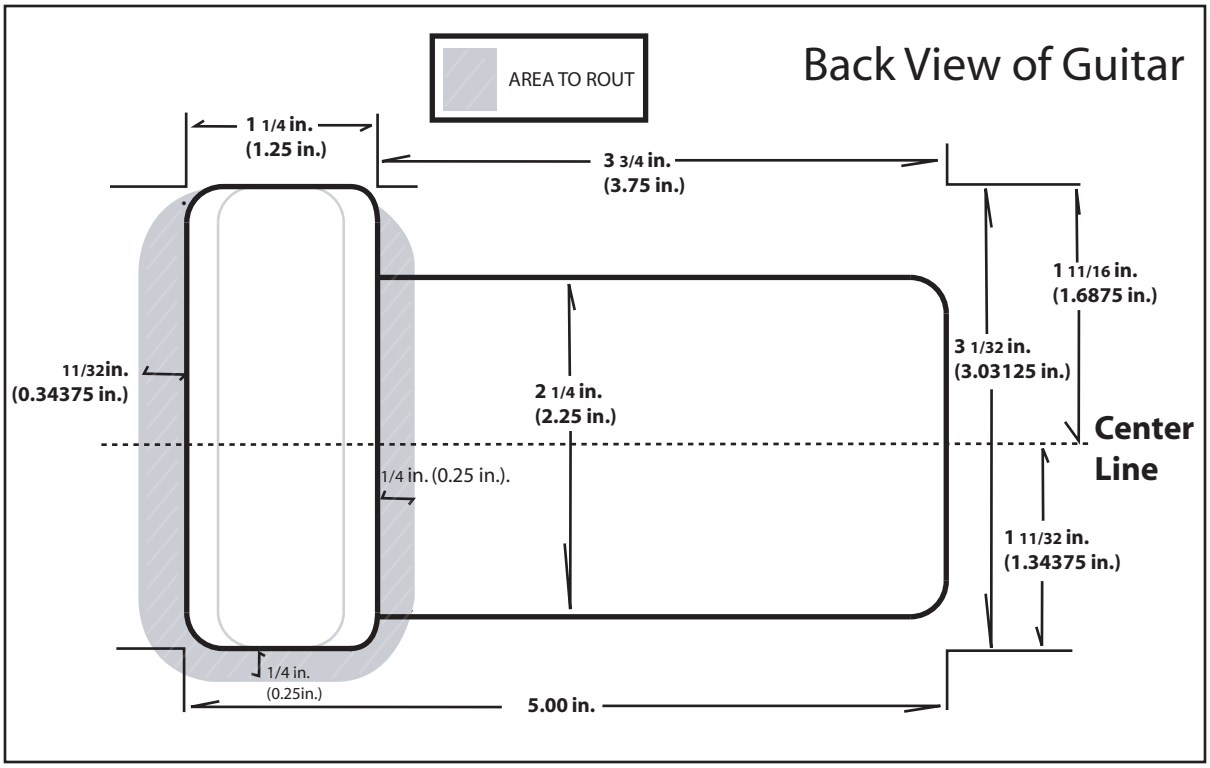
Back View of Guitar
AREA TO ROUT
1 1/4 in. (1.25 in.)
3 3/4 in. (3.75 in.)
1 11/16 in. (1.6875 in.)
3 1/32 in. (3.03125 in.)
11/32in. (0.34375 in.)
2 1/4 in. (2.25 in.)
Center Line
1/4 in. (0.25 in.).
1 11/32 in. (1.34375 in.)
1/4 in. (0.25in.)
5.00 in.